



Petrol driven ventilator MT 236 (5,5 HP Honda)

Easy Pow'Air Technology

Positioning from 0,90 m to 6 m

- **Automatic tilt** : Lifting the handle tilts the ventilator automatically to the correct working position.
- **Positioning from 0,90 m to 6 m** :
 - Effective between 2 to 6 m from the opening
 - Can also be positioned as near as 0,90 m
- **Noise** : 91 dBA at 3m (positioning the ventilator at a further distance reduces the noise level for the user).
- **Air Flow** : 43 100 m³/h.
- **Compact**, is easily stored in any locker on a fire truck.
- **Stable & easy to handle** : With its large wheels at the back, the MT236 is very easy to handle even in very adverse terrain.
- **Reinforced Turbine.**
- **Protective Frame** : epoxy coating.
- **Can be positioned to the precise angle you need** between +10° and +20° (Tilt positioning accessory to ventilate sub-terrain levels). The angle above 10° negates problems with stair cases.

New model :

40 min. additional running time
20% less CO emissions



- Easily stored in the boot of a vehicle
- Automatic tilt



CHARACTERISTICS

Model	Reference	Characteristics	Runing time At full speed (working inclination)	Dimensions w x h x d (mm)	Weight
MT236	I60.10.052	HONDA motor GX 160 (4 strokes): - Power according to SAEJ607 standard (before 2007) : 5.5 HP - Power according to SAEJ1349 standard (since 2007) : 4.8 HP	2h10	550 x 548 x 492	42 kg

• Oil Alert : Automatic engine cut due to low oil level.

ACCESSORIES

5m Duct	I60.20.101	Exhaust Pipe Adaptor	I60.20.014
Mister Adaptor	I60.20.104	Exhaust Pipe Extension – length 2.5m	I60.20.012
High Expansion Foam Adaptor	I60.20.105	Protective Cover	I60.20.017
Hourmeter	I60.20.135	- 10° Tilt Positioning Adaptor	I60.20.108



Easy Pow'Air Technology added to the Turbo-ventilators specific air entrainment effect :

Advantage 1 :

Effective between 2 to 6 m
Can also be positioned as near as 0,90 m

Advantage 2 :



Easy to handle :
More space between the entrance
and the ventilator.

Advantage 3 :

Ventilate in all circumstances,
even with raised floors or steps

Advantage 4 :

Reduced noise level for users due to a
positioning further away from the entrance.

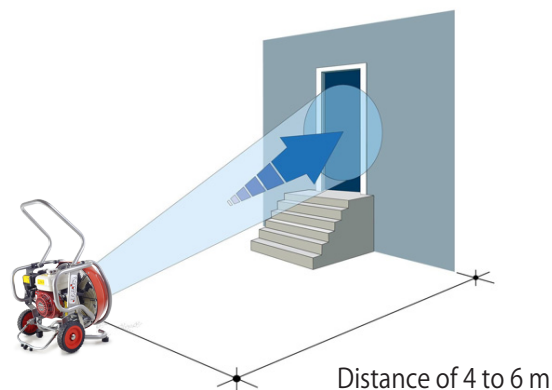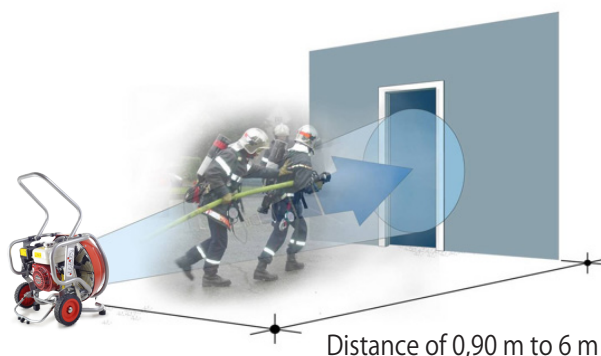

MAINTENANCE

Reduced maintenance due to its robust conception.
All the components are easily interchangeable by the user.



ZF03.118.EN.3
As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice.

