



# Partner lite

## Ultra reduced portable monitor

### Speed, efficiency and Compactness

#### Specifications :

- **Adjustment up to 20° either side** (40° total sweep ) horizontally from central position.
- Elevation from +20° up to +60° (manned between +30° to +20°).
- The monitor is constructed of **anodized aluminium and stainless steel**, giving maximum durability.
- **Flowrate** : up to 2000l/min.



Oscillating Partner Lite



- Ultra compact
- 3 Tungsten carbide spikes for maximum stability even on hard surfaces
- Captive attached safety strap
- Good foam quality with LX Foamjet



Partner lite

# CHARACTERISTICS


	Partner Lite	Oscillating Partner Lite
Inlet	2.5" BSP F	2.5" BSP F
Weight	6.9 kg	10.5 kg
Weight with nozzle	9.7 kg	13.3 kg
Dimensions in folded position (cm)	L38 x I22 x h24	L45 x I30 x h31
Dimensions with nozzle (cm)	L51 x I22 x h24	L63 x I30 x h31
Reference ( inlet : 2.5" BSP Female )	I12.11.097	I12.11.099
Reference ( inlet : BS336 instantaneous coupling )	I12.11.090	I12.11.091

## AVAILABLE ACCESSORIES

Duojet nozzle 265-950 l/mn	I12.42.013
Jetmatic nozzle 190-1350 l/mn	I12.42.001
Maxlite nozzle 1300 l/mn	I11.20.066
Maxlite nozzle 2000 l/mn	I11.20.055
Maxmatic nozzle 400-2000 l/mn	I12.42.014
Maxforce nozzle 400-2000 l/mn	I12.42.012
Polyfoam LX adaptor (for Jetmatic/Duojet nozzles)	I11.80.117
Polyfoam LX adaptor (for Max./Master. nozzles)	I11.80.007



### REACH OF MAXMATIC AND MAXFORCE NOZZLE IN 7 bar POSITION

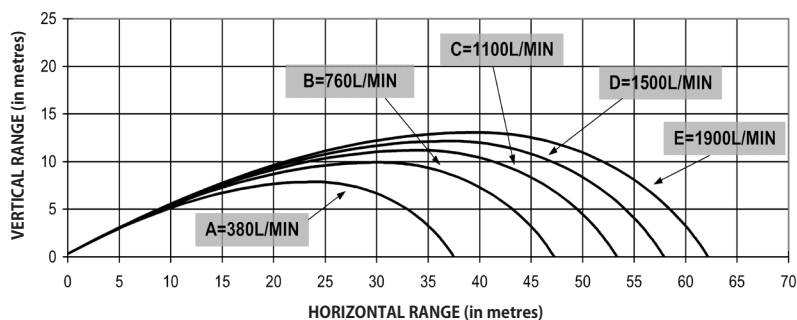

ZF02.017.EN.3

As it is our policy to constantly seek to improve our products, we reserve the right to change the specifications of our equipment without notice.

